











Product Parameters

•Model Number:

FL085568

•Working Temperature:

-20-45°C

Luminous Efficiency:

85LM/W

·PF:

>0.9

•IP Rating:

IP65

•Power:

30W.

•Colour Temperature:

2700K-6500K

•Standby Power Consumption:

1.2W

•Lifespan:

50000 hours

•RF:

2.4GHz

•Input Voltage:

AC 100~240V 50/60Hz.

•Luminous Flux:

2800LM

•CRI:

>80


•Beam Angle:


160°

•Control Distance:

30m



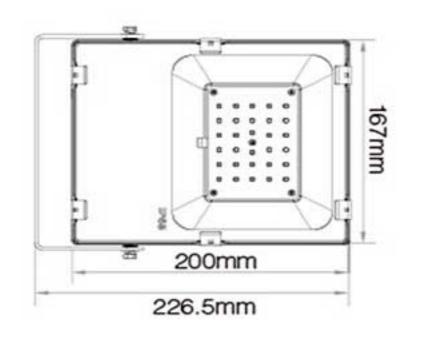







16 million colours to choose





Control has never been easier

2.4G remote control, Smart phone APP control, enjoy the convenient life bring by technology (* Need 2.4GHz Gateway(WL-Box1) for smartphone APP control)








Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

Modes synchronization

Different lighting fixtures can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

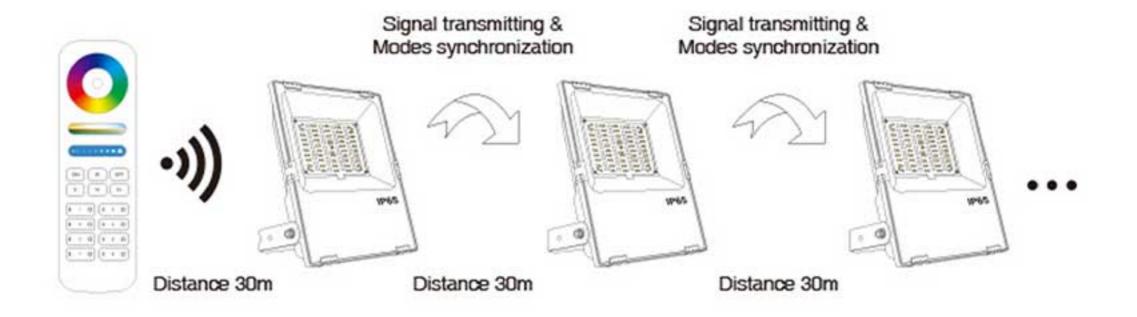

IP65 Waterproof

Professional waterproof technology; High performance waterproof









Application scene display

Apply to the lighting place like architectural lighting, landscape lighting, public lighting etc



